Клиент Количество

Проект Позиция



## Печь Function

**Модель:** BER443 **Код:** NP01041022001

### Технические данные


| | |
|---|---|
| **Количество противней:** | 4 |
| **Шаг установки противней (мм):** | 433x333 |
| **Шаг установки противней (мм):** | 70 |
| **Количество вентиляторов:** | 2 |
| **Скорость вентилятора:** | 1 |
| **Габариты (мм):** | 557 x 640 x 563 |
| **Вес (кг):** | 37 |
| **Объём ($м^3$):** | 0,200 |
| **Размеры камеры (мм):** | 452 x 371 x 326 |
| **Электрическая мощность (кВт):** | 3,3 |
| **Электропитание (V):** | 220-240 |
| **Электропитание (A):** | 15,5 |
| **Количество фаз:** | 1N |
| **Сечение кабеля ($мм^2$):** | 3G1,5 |
| **Частота (Гц):** | 50-60 |
| **Габариты с упаковкой (мм):** | 590 x 680 x 788 |
| **Размеры камеры (мм):** | 452 x 371 x 326 |
| **Масса брутто (кг):** | 40 |
| **Объём брутто ($м^3$):** | 0,320 |

### Характеристики

| | |
|---|---|
| **Тип печи:** | Конвекция |
| **Панель управления:** | Электромеханический |
| **Функции:** | Приготовление в режиме конвекции |
| **Пар:** | Прямой режим |
| **Управление парообразованием:** | С таймером |
| **Диапазон температур:** | 50°C - 300°C |
| **Дверь:** | Откидная дверца |
| **Дно камеры приготовления:** | AISI 430 полированная поверхность |
| **Диапазон таймера:** | 1' - 120' |
| **Дымоход:** | Всегда открытый |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

## Технический чертеж

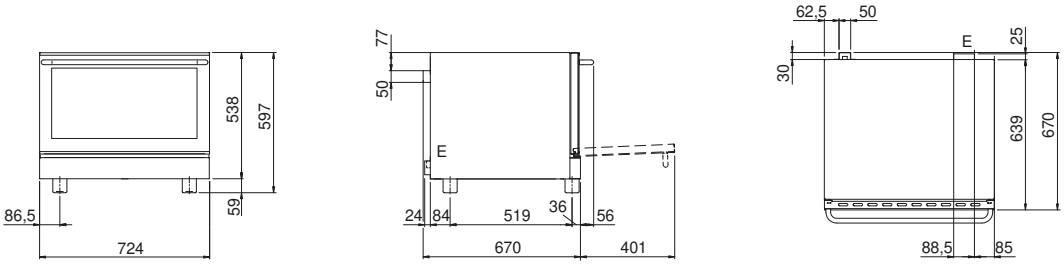


**E :** Alimentazione elettrica

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.