
Client _____ Quantity _____

Project _____ Position _____

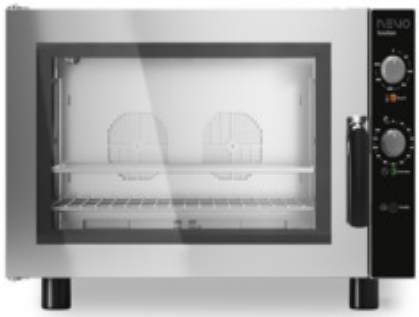

Function oven

Model: BEU464 **Cod:** NP01041022005

Technical data

Number of pans:	4
Pans size (mm):	EN 600x400
Tray centre distance (mm):	75
Number of fans:	2
Fan speed:	1
Dimensions (mm):	825 x 752 x 561
Net weight (kg):	55
Volume (m3):	0,350
Chamber size (mm):	618 x 435 x 358
Electric power (kW):	6,3
Voltage (V):	380-415
Power supply (A):	14
Phases:	3N
Cable section (mmq):	5G2,5
Frequency (Hz):	50-60
Cold water connection:	3/4"
Cold water pressure (bar):	Max. 5 bar
Drain size (mm):	30
Packing dimensions (mm):	850 x 790 x 731
Chamber size (mm):	618 x 435 x 358
Gross weight (kg):	59
Gross volume (m3):	0,500


Features

Oven type:	Convection
Control:	Electro-mechanic ovens
Functions:	Convection cooking, cooking with humidity
Steam:	Direct
Steam management:	Pressure
Temperature range:	50°C - 300°C
Door:	Hinged door
Fan:	Made of AISI 304 stainless steel – autoreverse
Cooking chamber bottom:	AISI 430 mirror finish
Range timer:	1' - 120'
Flue:	Always open

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.

Electro-mechanical electric convection ovens with humidifier. Capacity 4 trays 600X400. Cooking chamber with rounded corners, welded without visible welding. Adjustable height of the feet. Removable grid shelves with distance between trays of 75 mm. Door with wide glass surface equipped with air channel for the external glass ventilation, which further limits the temperature on the external surface. Door handle in plastic material, highly resistant to shocks and temperatures. Silicone gasket inserted in the front of the chamber, with maximum seal capacity, avoiding temperature drops. Heating through high efficiency coated heating elements. Timer from 1' to 120' (plus infinite position). Manual button humidifier. Temperature control in the cooking chamber from 50 °C to 300 °C. 2 fans. Wide air flow channels of the chamber that allows a perfect cooking uniformity, both in conditions of scarce and full load. Folding opening of the internal glass. Control panel of all the functional parts placed on the right side of the oven. Safety thermostat in the cooking chamber to avoid dangerous high temperatures. Water inlet for the humidifier control. Internal lighting positioned on the left side of the cooking chamber. Electric power 6,3 kW - 380-415V/3N+G 50/60 Hz

Technical draw

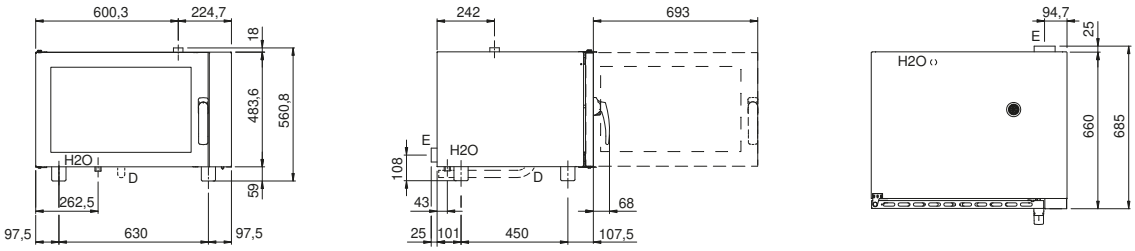

E: Electric connection **D:** Drain for water **H2O :** Water inlet 3/4"

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previosly or subsequently sold.