

Client \_\_\_\_\_ Quantity \_\_\_\_\_  
Project \_\_\_\_\_ Position \_\_\_\_\_



## Pratika oven

Model: FDG101TV

Cod: NP01102033005

### Technical data


Number of pans:	10
Pans size (mm):	EN 600x400 - GN 1/1
Tray centre distance (mm):	74
Number of fans:	2
Fan speed:	2
Dimensions (mm):	905 x 845 x 1130
Net weight (kg):	140
Volume (m3):	0,865
Chamber size (mm):	645 x 449 x 800
Electric power (kW):	0,8
Voltage (V):	220-240
Power supply (A):	3,5
Phases:	1N
Cable section (mmq):	3G1,5
Frequency (Hz):	50
Gas power (kW):	19
Total gas power (Kcal/h):	16337
Gas connection:	1/2"
Cold water connection:	3/4"
Cold water pressure (bar):	Max 5 bar
Softened water inlet:	3/4"
Drain size (mm):	40
Packing dimensions (mm):	955 x 900 x 1301
Chamber size (mm):	645 x 449 x 800
Gross weight (kg):	156
Gross volume (m3):	1,120

### Features

Oven type:	Combi
Control:	Touch screen
Touch screen:	5"
Cooling:	Rapid chamber cooling function
Probe:	Standard - one single point core probe
Washing:	Standard - Open Circuit
Detergent:	Liquid
Steam:	Direct
Steam management:	Automatic
Temperature range:	30°C - 280°C
Door:	Hinged door
Flue:	Automatic
Recipes:	Standard

Gas multifunction oven with capacitive touch screen. Capacity 10 trays GN 1/1 or pastry 600x400. Three cooking modes: convection, steam and mixed. Equipped with recipe book and possibility to store personalized recipes in automatic sequence (up to 16 cycles). Cooking chamber with rounded corners in order to guarantee an easy cleaning. Internal pair of grid support, removable and replaceable, having gap between grids of 74 mm. Door with wide glass surface. Air channel for the external glass ventilation which limits the temperature on the external surface. 2 autoreverse fans with two-speed-fan regulation. Gasket inserted in the front of the chamber, with maximum seal capacity. Electronic air-valve opening. Indirect heating by flame tubes and atmospheric burners. Removable liquid/condensate collecting basin placed under the chamber. Temperature control in the cooking chamber from 50° to 280°C. Single point core probe, grid 600x400 and automatic washing system included. Total gas power: 19 kW. Electric power 0,8 kW - 220-240V 50 Hz

## Technical draw

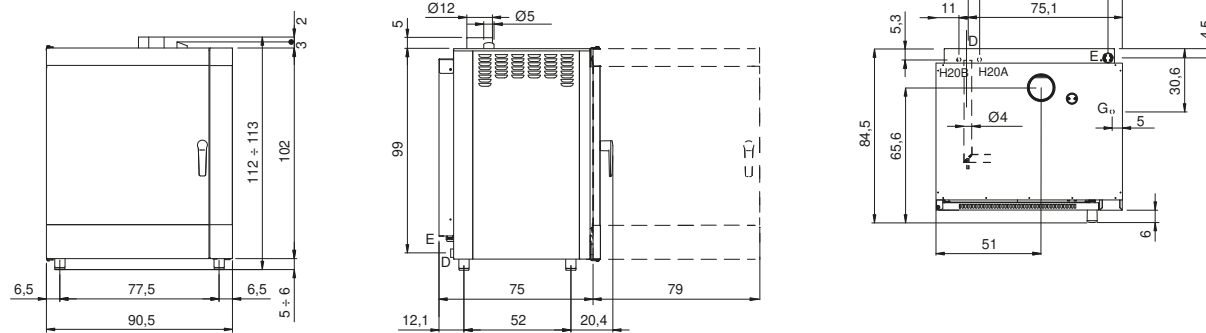

G: Gas connection

E: Electric connection

D: Drain for water

H2OA: Water inlet

H2OB: Softened water inlet